

BattRack™ BRU-series integrated battery cabinet solution offers a turn-key battery and battery cabinet option for UPS battery backup.

Cabinet solutions are available in both size and color to match most UPS system manufacturers.

Cabinet solutions can be equipped with an optional circuit breaker for either external or internal disconnect access, fusing, optional levelers, casters, hinged doors or system overcurrent protection.

Cabinet solutions can be integrated with the BatteryInformer® providing battery state of health remote monitoring and battery warranty management.



System Features

- **NARADA HRL** Series batteries
- Removable front, side and back panels for battery access
- Electrostatic baked epoxy powder coat for superior durability and resistance to corrosion and scratches
- Standard Color (off-white) Custom Colors Available
- Manufactured under certified compliance to: ISO9001:2000 and ISO14001
- Forklift accessible
- Overcurrent Protection Breaker / Fuse
- Vented and meets NEMA 1 Standard
- Factory prewired and ready for installation
- Integrated thermal management
- Latched and locking front panel
- Compliant to UL 1778 and UL 924
- Hi-Pot tested prior to shipment
- MTW 600V, 105°C Flexible cable
- Seismic certified to CBC2013 & IBC2012 utilizing importance factor 1.5 & worst case seismic coefficients of $S_s=3.370$ and $S_1=1.389$ given by USGS

Applications


- Uninterruptible Power Supply (UPS) Systems
- Communications
- Central Office
- Data Centers
- Emergency Lighting

Narada

stored energy solutions for a demanding world

Available added Features

- Breaker options include UVR/Shunt and auxiliary contacts
- Home run cables from each breaker to breaker/UPS landing cabinet
- Landing bus bars or terminal block for parallel cabinet connections
- Wall mount circuit breakers
- Smoke detector
- Ground fault detector
- Spill containment
- Custom colors
- SOS (Spares On Site) systems
- Battery monitoring
- External Flashing alarm strobe
- Alarm controller contact point with SMS or SMTP capability
- Temperature Probe with alarm capability

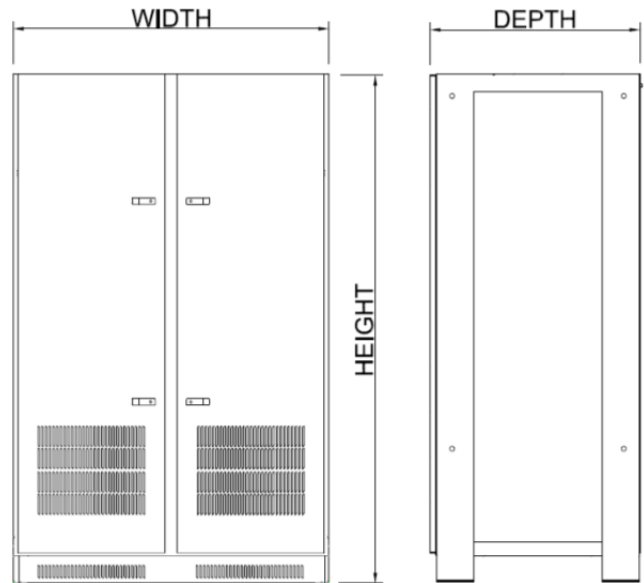

Top Terminal

Model No.	Width		Depth		Height		Weight	
	in	mm	in	mm	in	mm	kg	lbs.
BRUA303266	30.0	762	32.0	813	66.0	1676	204	450
BRUA282974	28.0	711	29.5	749	73.6	1869	204	450
BRUA363071	36.0	914	30.5	775	71.0	1803	227	500
BRUA363078	36.0	914	30.5	775	78.7	1999	227	500
BRUA403078	40.0	1016	30.5	775	78.7	1999	234	515

Other sizes available on request

Front Terminal

Model No.	Width		Depth		Height		Weight	
	in	mm	in	mm	in	mm	kg	lbs.
BRUA283240	28	711	31.6	803	40	1016	204	450
BRUA423250	42	1067	31.6	803	50	1270	227	500
BRUA423271	42	1067	31.6	803	71.1	1807	306	675
BRUA483271	48	1219	31.6	803	71.1	1807	318	700
BRUA423261	42	1067	31.6	803	61.1	1553	295	650
BRUA463284	45.5	1156	31.5	800	84.0	2134	363	1000

Other sizes available on request



BatteryInformer®
BI-Smart-500



NARADA HRL Series batteries

China: **Narada**
NARADA POWER SOURCE CO.,LTD.
No.459 Wensan Road, Hangzhou, Zhejiang, P.R.China
Tel:+86-571-28827013 Fax:+86-571-85126942
Website:www.en.naradabattery.com E-mail: intl@narada.biz

MPI Narada MPI-Narada
44 Oak St
Newton, MA 02464
Tel: 800-982-4339
sales@naradausa.com www.naradausa.com

